





170 Patio Door Foot Lock Installation

The Foot Lock is a secondary security lock that is employed with the mortise lock in the closed position. This device was not intended as a fresh air stop or multi-position lock. The Foot Lock does comply with forced entry specifications.

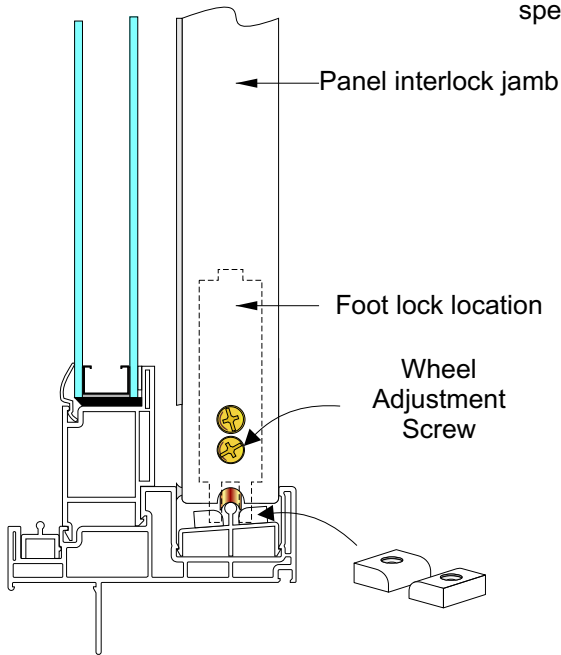

FOOT LOCK
BH1769XX


LOCK PIN STOP
BH1770XX

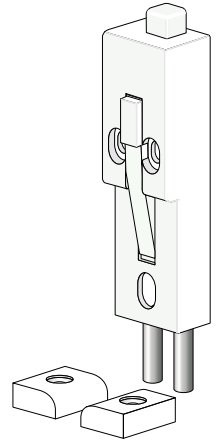

After the door is installed, make wheel adjustments if needed to align the panel with the strike jamb, to obtain an equal reveal, and adequate clearance between lock pin stops and panel.

Locate the foot lock to the panel, **in the locked position**, aligning the adjustment screw access hole with the adjustment screw. Drill pilot holes through the mounting holes into the door panel. Install the 2 #8 x 1 1/2" pan head phillips mounting screws.

In the unlocked position, check that the panel will pass over the lock pin stops located on the track surface.

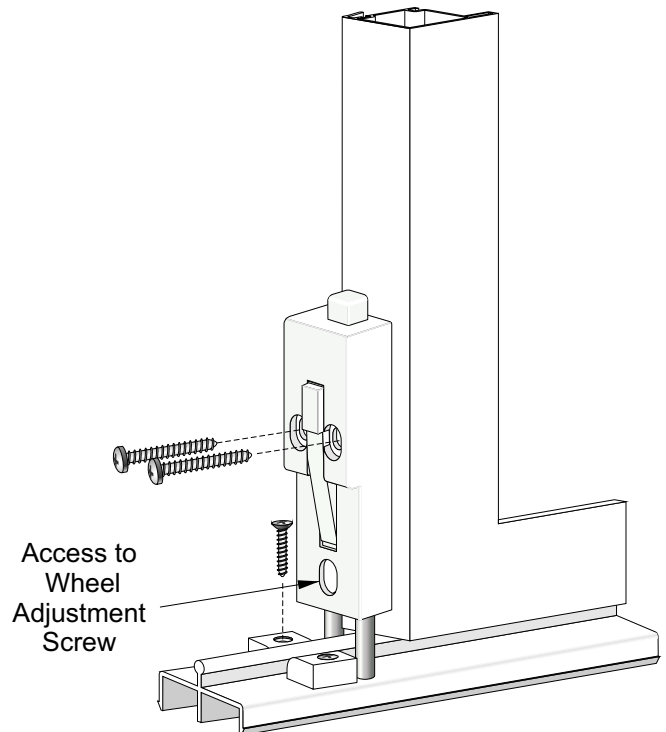

Locate lock pin stops last. Close and lock the panel. Place both lock pin stops as illustrated onto the track and secure with #8 x 1" flat head, phillips screws.